OC 987

AIRPORT OBSTRUCTION CHART
WICHITA MID-CONTINENT AIRPORT, WICHITA, KANSAS

AIRPORT ELEVATION 1332 FEET

AIRPORT PLAN

North American Datum of 1983 (NAD 83) coordinates may be converted to chart datum coordinates for plotting on this chart by adding the following corrections to the NAD 83 coordinates.

Latitude –00.05"
Longitude –01.17"

These corrections represent a shift of approximately 29 meters (94 feet).

AMENDMENT DATA

DIMENSIONS AND ELEVATIONS ARE IN FEET

Surveyed and compiled by the National Ocean Service (NOS), U.S. Department of Commerce in accordance with specifications and standards of accuracy of the Federal Aviation Administration, Department of Transportation and NOS.

9th Edition
Field Surveys November 1988
Published July 1989

Published at Washington, D.C.
U.S. Department of Commerce
National Oceanic and Atmospheric Administration
National Ocean Service

C55.411/3:OC 987

best copy available

AIRPORT OBSTRUCTION CHART
WICHITA MID-CONTINENT AIRPORT, WICHITA, KANSAS

NATIONAL OCEAN SERVICE

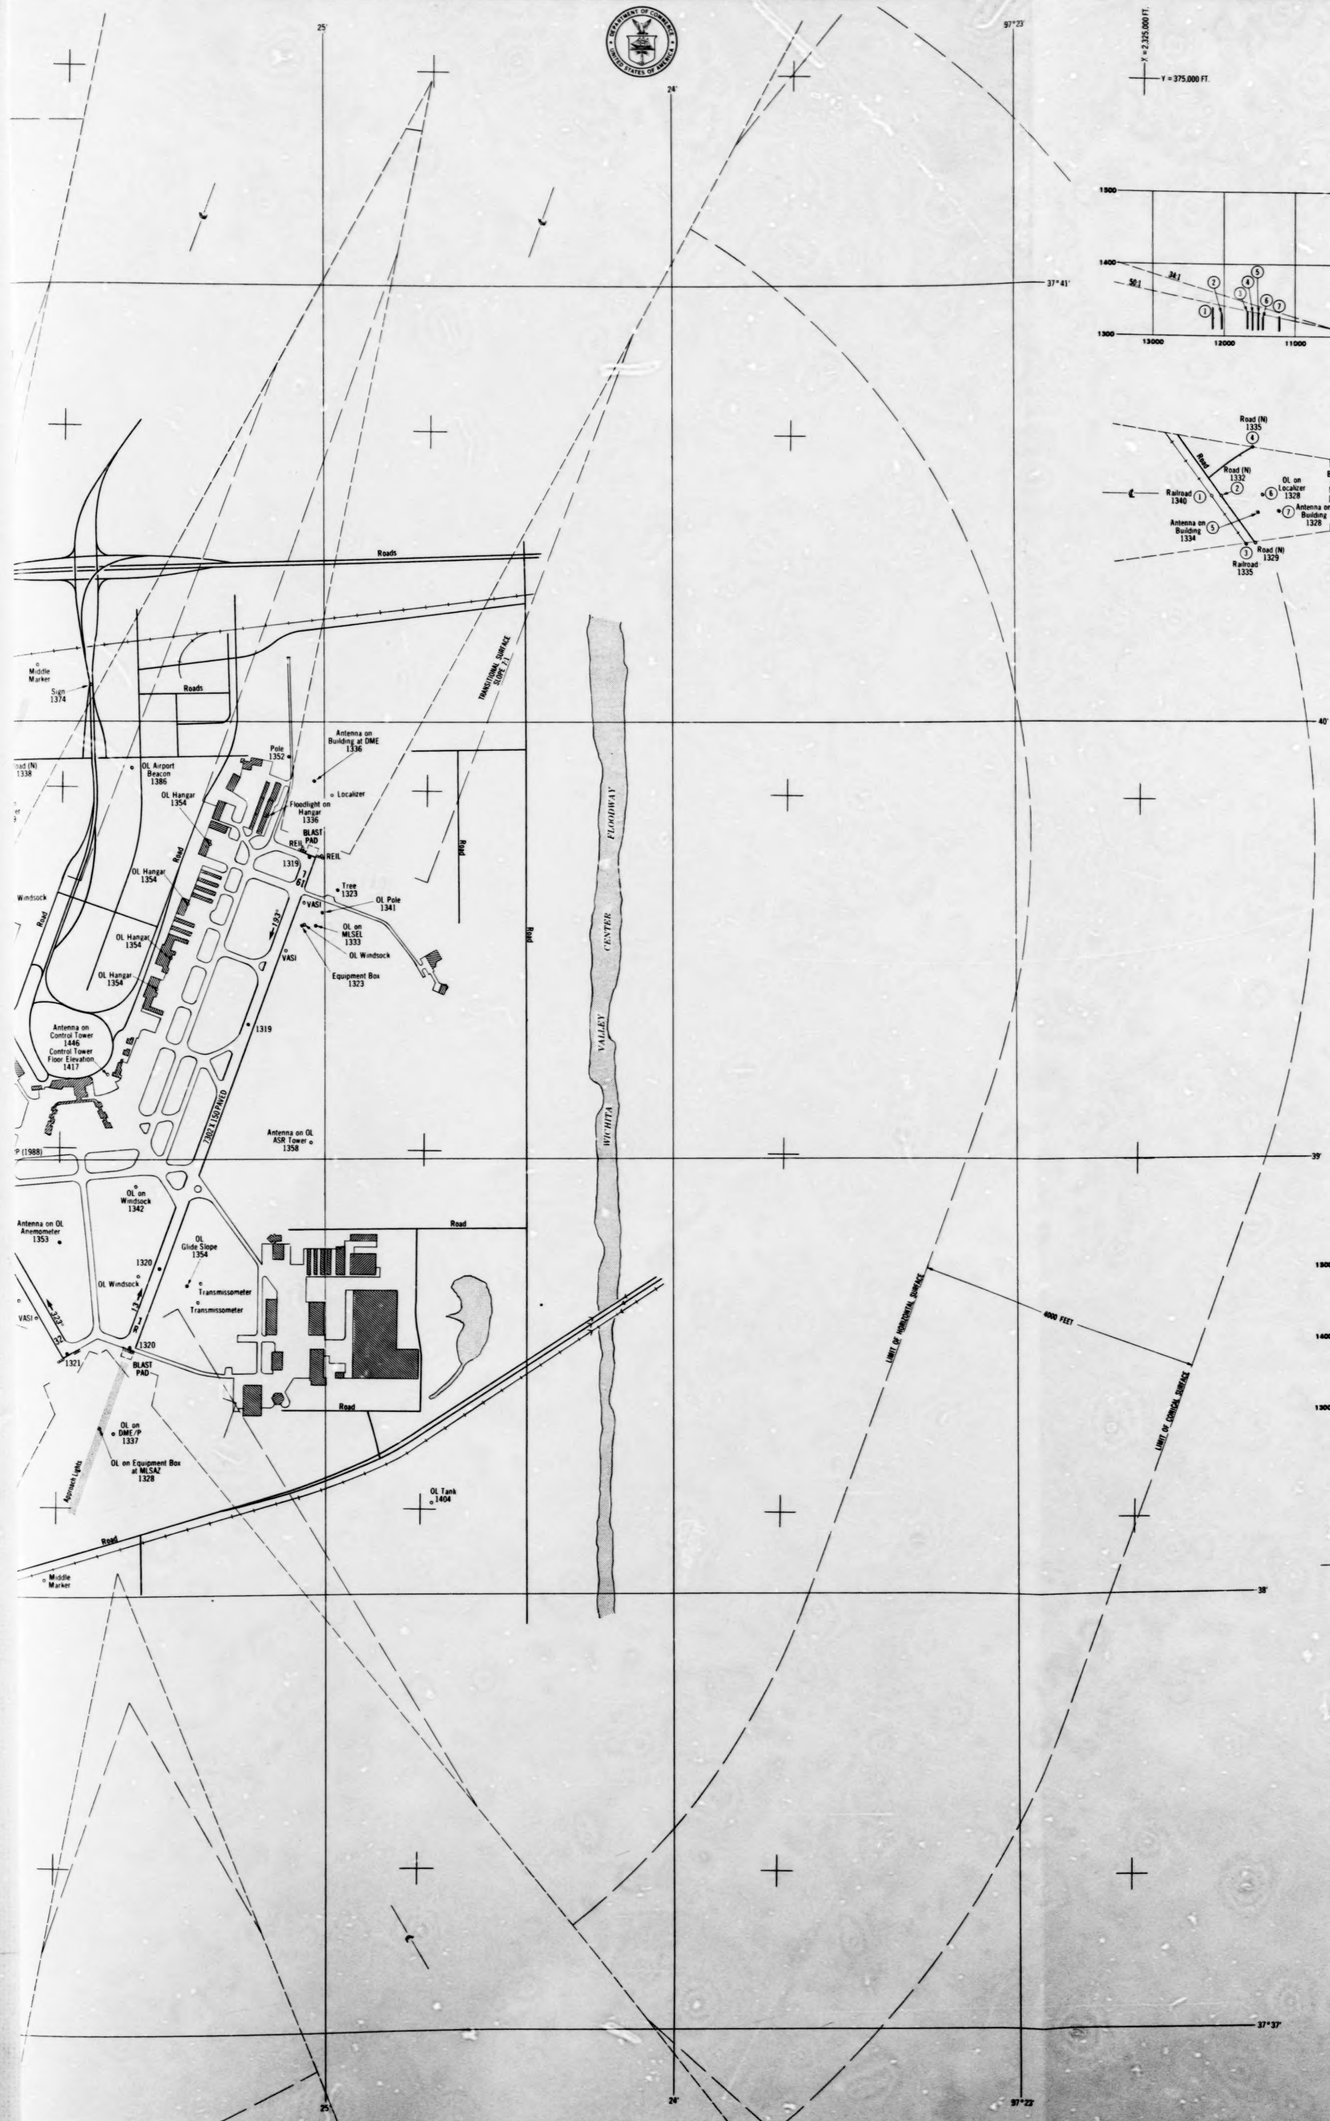

Published at Washington, D.C.
U.S. Department of Commerce
National Oceanic and Atmospheric Administration
National Ocean Service

RUNWAY PLANS AND PROFILES

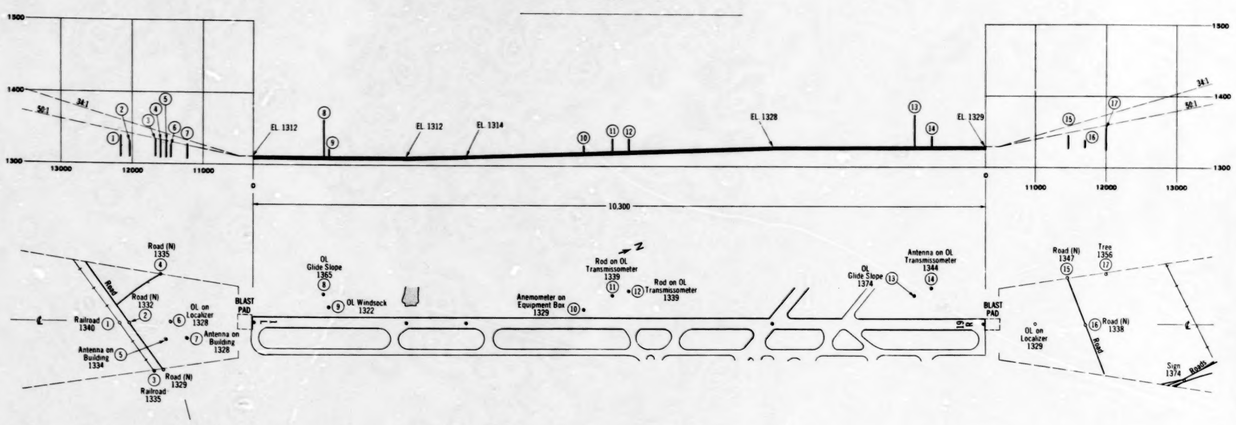

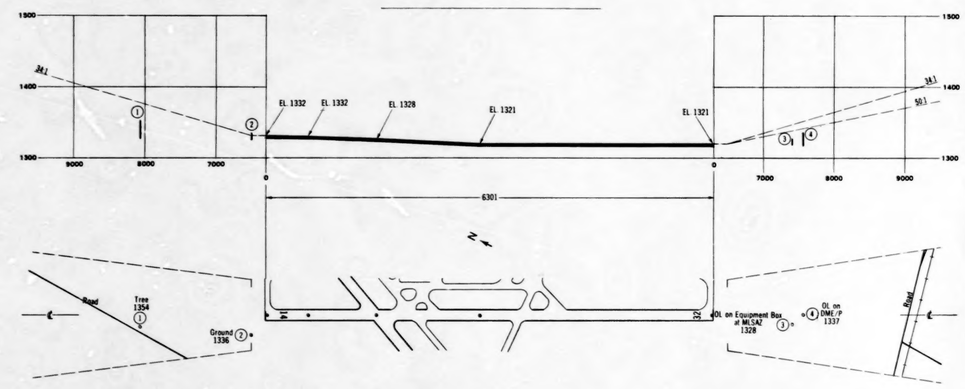

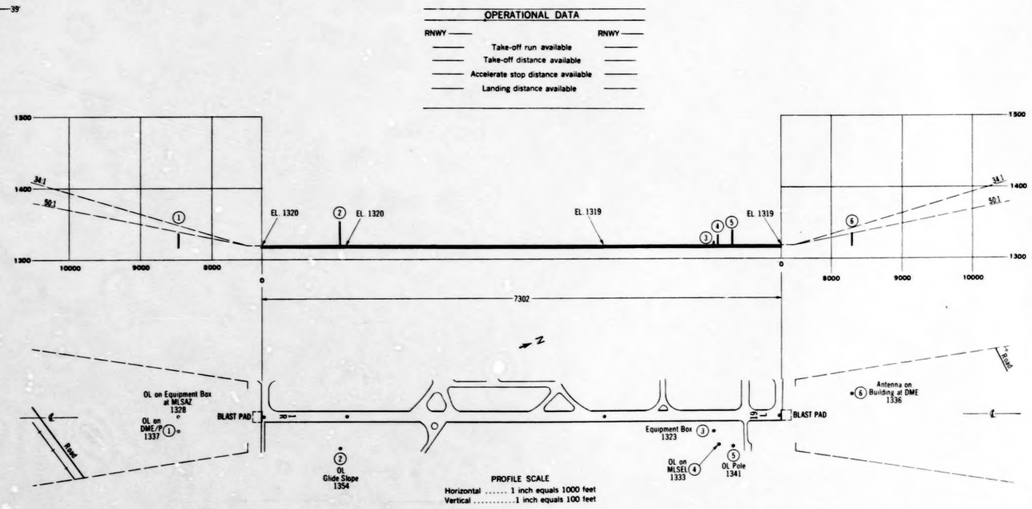

LEGEND

- Airport Reference Point (ARP)
- Official Airport Elevation
- With elevation - object does not penetrate specified or supplemental surface. Without elevation - position only
- Object penetrates specified surface
- Wooded area penetrates specified surface
- Ground area penetrates specified surface
- Object penetrates supplemental surface only
- Wooded area penetrates supplemental surface only
- Ground area penetrates supplemental surface only
- Water
- Threshold lights
- Supplemental surface
- ( ) Feet above ground level
- Road(I) Interstate highway
- Road(N) Noninterstate highway
- OL Obstruction Light or Obstruction Lighted

SPECIAL NOTES

Fifteen feet added to noninterstate road elevations
Seventeen feet added to interstate road elevations
Twenty-three feet added to railroad track elevations
Transitional surface slopes are 7:1 unless otherwise indicated
Obstructing area limits are approximate

AIRPORT OBSTRUCTION CHART

The Airport Obstruction Chart (OC) depicts Federal Aviation Regulations Part 77 (FAR 77) surfaces, a representation of objects that penetrate these surfaces, aircraft movement and apron areas, navigational aids, prominent airport buildings, and a selection of roads and other planimetric detail in the airport vicinity. Also included are tabulations of runway and other operational data.

OC content, format, and accuracy conform to the standards specified in FAR 77, "Objects Affecting Navigable Airspace" and FAA Nr. 405, "Specifications – Airport Obstruction Chart and Related Products."

HORIZONTAL SCALE	1:12,000
HORIZONTAL DATUM	North American Datum of 1927
VERTICAL DATUM	National Geodetic Vertical Datum of 1929
PROJECTION	Lambert Conformal Conic
GRID SYSTEM	Kansas State Grid South Zone

OPERATIONAL DATA

AIRPORT LOCATION POINT	LAT. 37° 39'	LONG. 97° 26'
AIRPORT REFERENCE POINT	LAT. 37° 38' 59.791"	LONG. 97° 25' 57.770"

RUNWAY	LATITUDE	LONGITUDE	TDZE	*GEODETIC AZIMUTH
1L	37° 38' 06.030"	97° 26' 44.405"	1.314	199° 59' 29"
19R	37° 39' 41.720"	97° 26' 00.616"	1.329	19° 59' 55"
1R	37° 38' 33.908"	97° 25' 33.448"	1.320	200° 00' 19"
19L	37° 39' 41.738"	97° 25' 02.385"	1.319	20° 00' 38"
14	37° 39' 27.129"	97° 26' 23.090"	1.332	329° 59' 50"
32	37° 38' 33.178"	97° 25' 43.918"	1.321	150° 00' 14"

*Geodetic azimuth reckoned clockwise from south

WICHITA MID-CONTINENT AIRPORT, WICHITA, KANSAS

OC 987